

Super rope end swinger midi, Art # 4585-50

All installations, inspections, maintenance and operations have to accord to the guidelines of the EN1176-7 !

The complete assembling instructions, the maintenance guidelines and the maintenance printout have to be forwarded to the operator !

Before the installation, it's necessary to check the completeness of the several item parts and the fixations, according to the item number of the enclosed list of material.

Number of materials :

1 mainpart 5,50 x 8,60 m incl. stand posts and tie-bar



1 main rope with suspension ropes

1 cardboard with accessories

Required floor space: 5,50 x 12,75 m (incl. safety area)

Required level surface: Sand, bark mulch, gravel, etc.

Required additives for assembling: crane or digger, standard tools

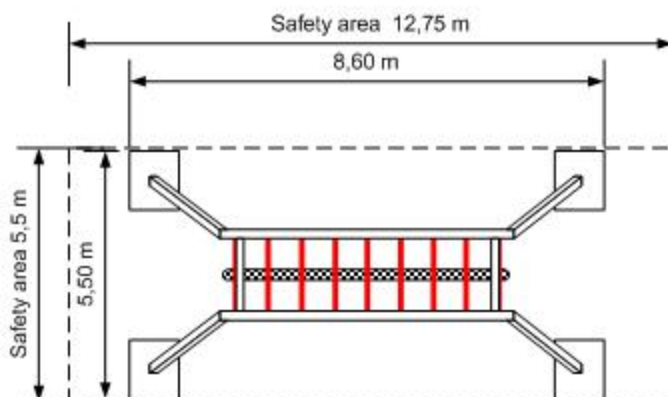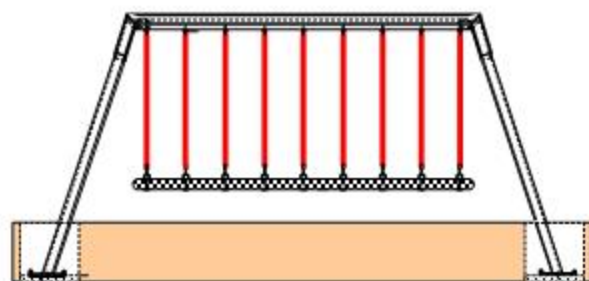

Diese Zeichnung darf ohne unsere schriftliche Ermächtigung nicht verwendet, nicht vervielfältigt, auch nicht Dritten mitgeteilt oder zugänglich gemacht werden. Zuwiderhandlungen werden zivil- und strafrechtlich verfolgt und verpflichten zu Schadenersatz.

Art # 4585-50

**Super rope end
swinger midi**



	Datum	Name
Bearb.	18.02.03	Henrich
Gepr.		

Huck Seiltechnik GmbH & Co. KG
Netz- und Seilschleppgeräte
Dillerberg 4 D-35614 Aßlar-Berghausen
Postfach 1206 D-35608 Aßlar-Berghausen
Telefon (06443) 83111-0, Telefax (06443) 83 11-79


Page 1

Index	Änderung	Datum	Name


4585-50E.vsd

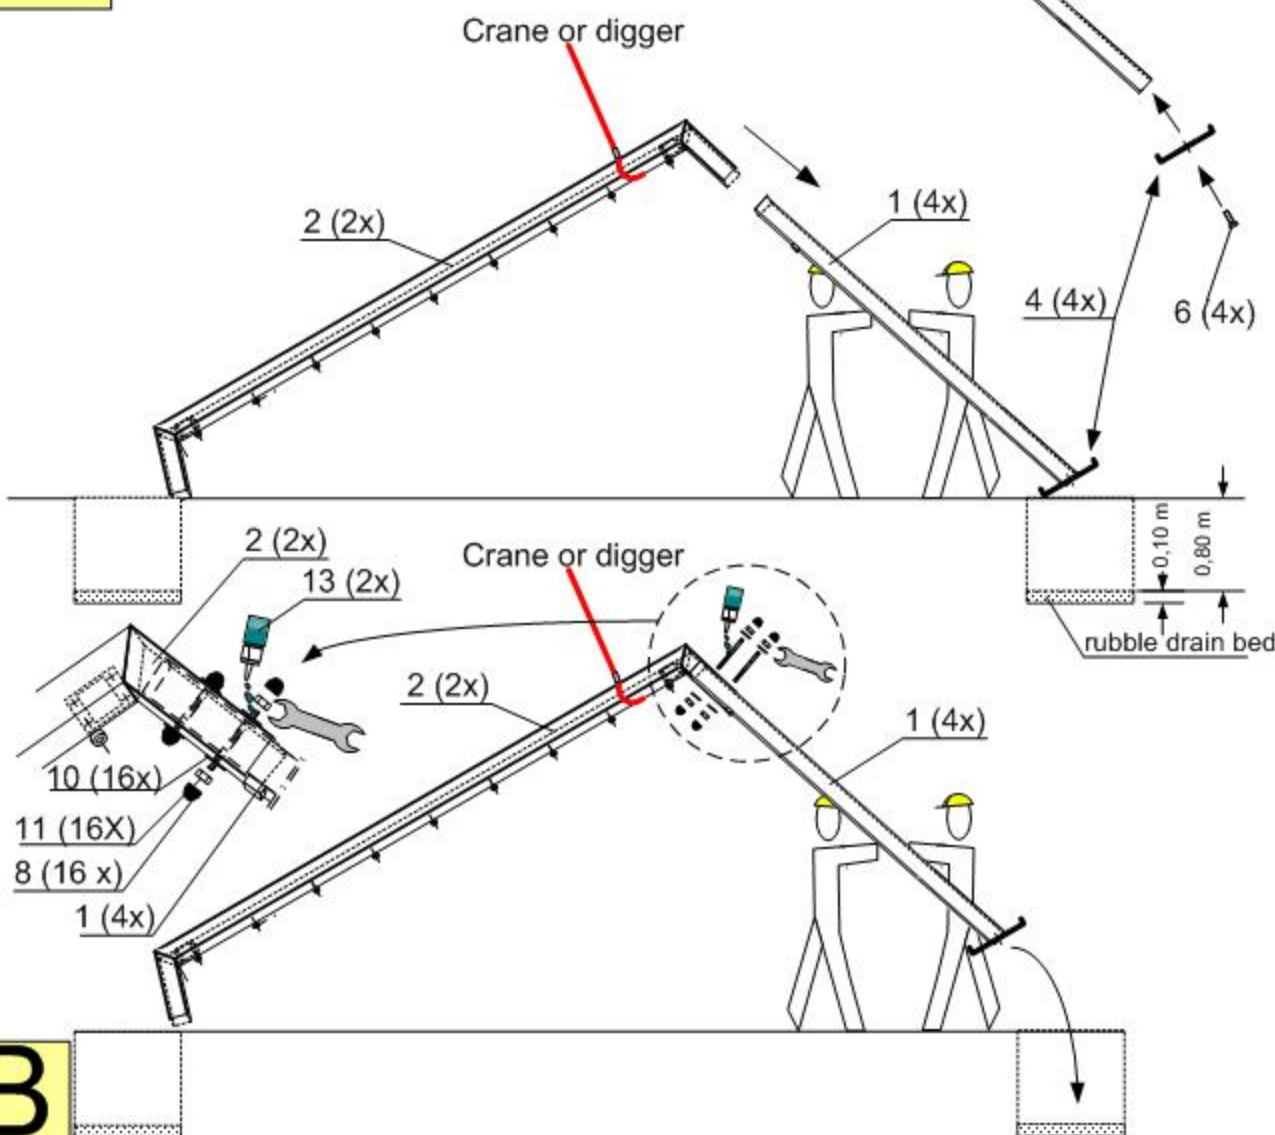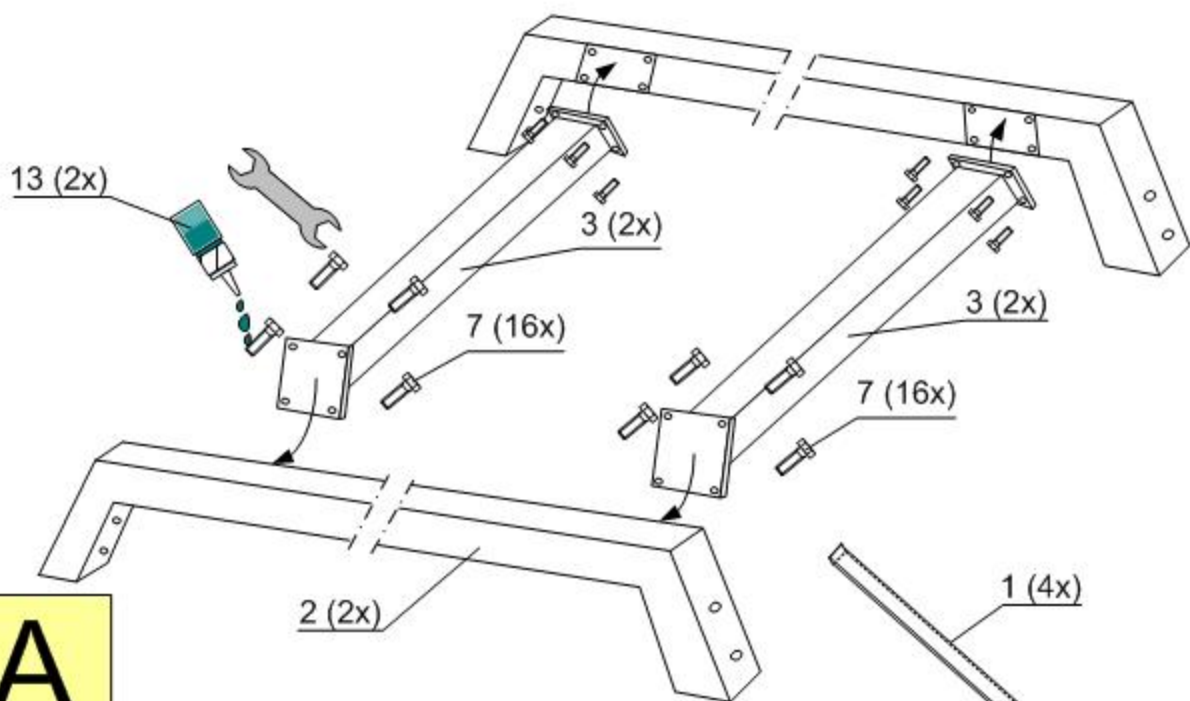


C

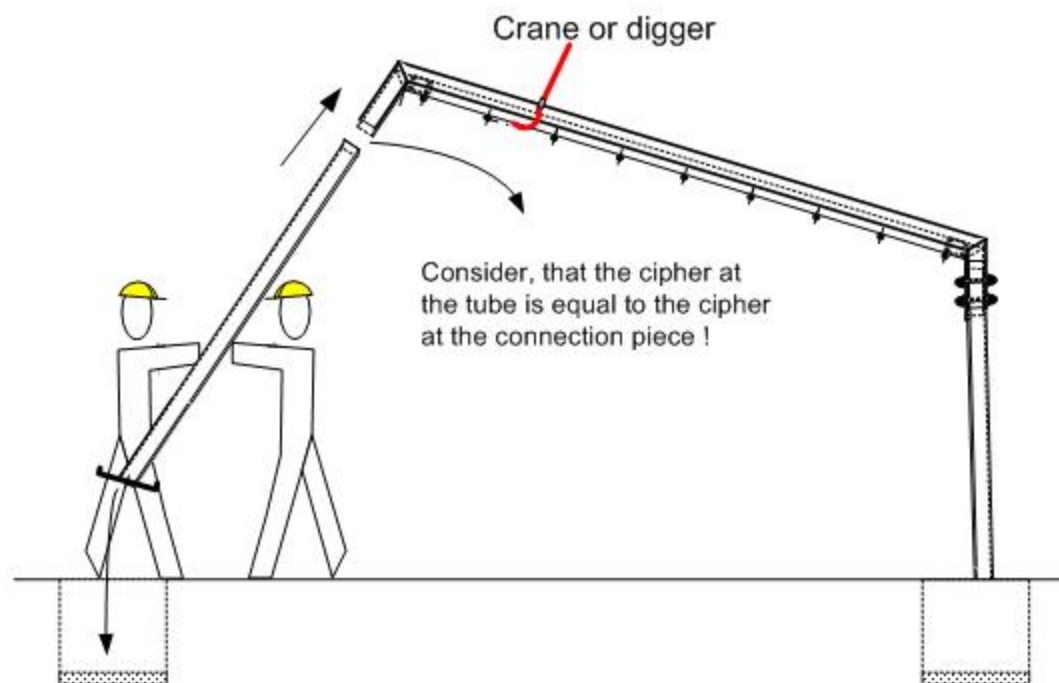



D

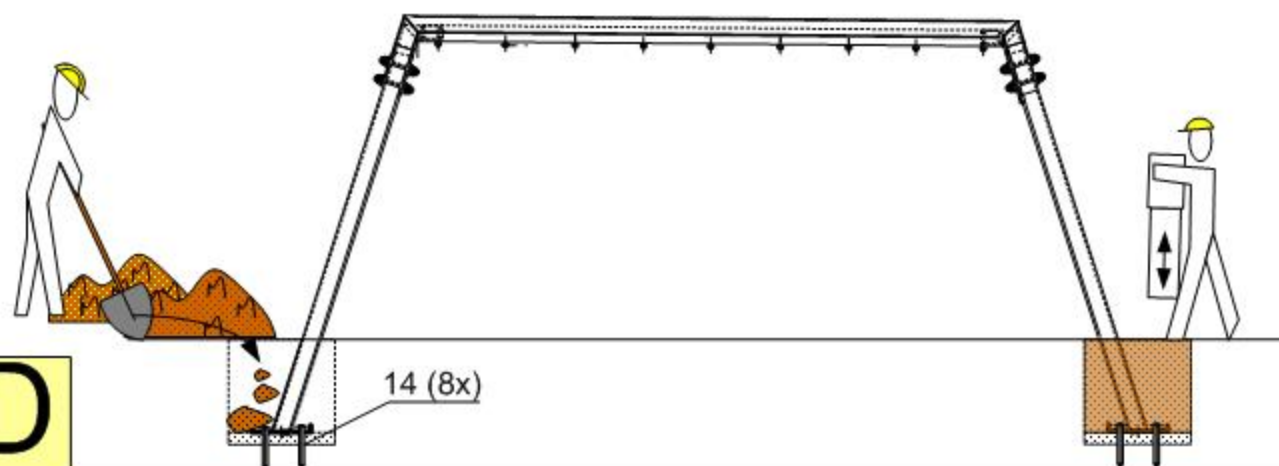

13 (2x)

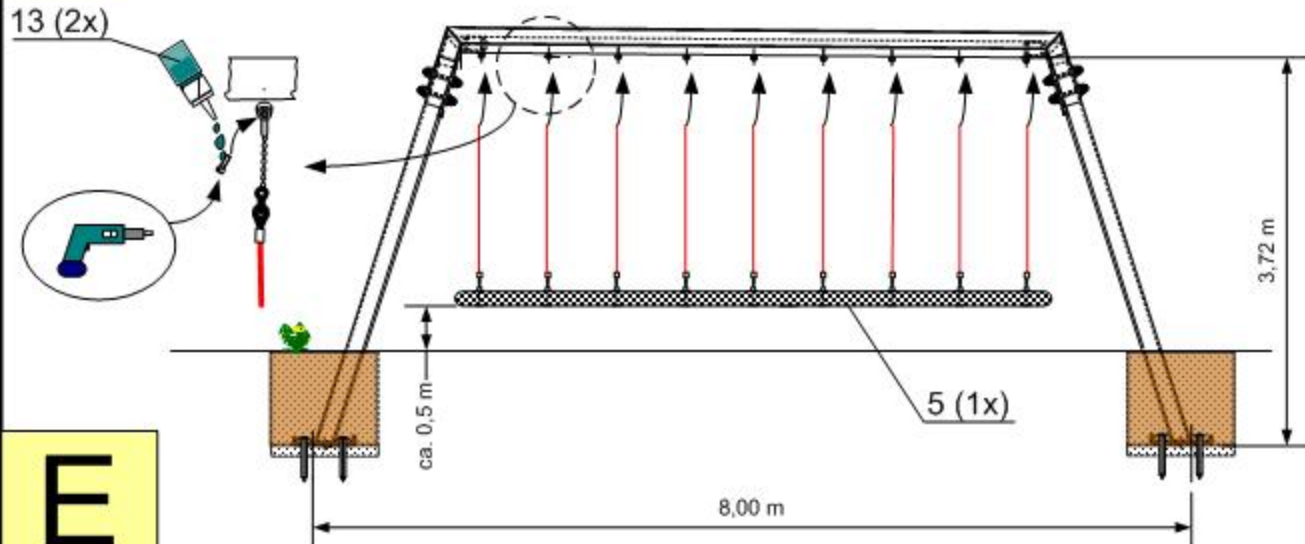

E

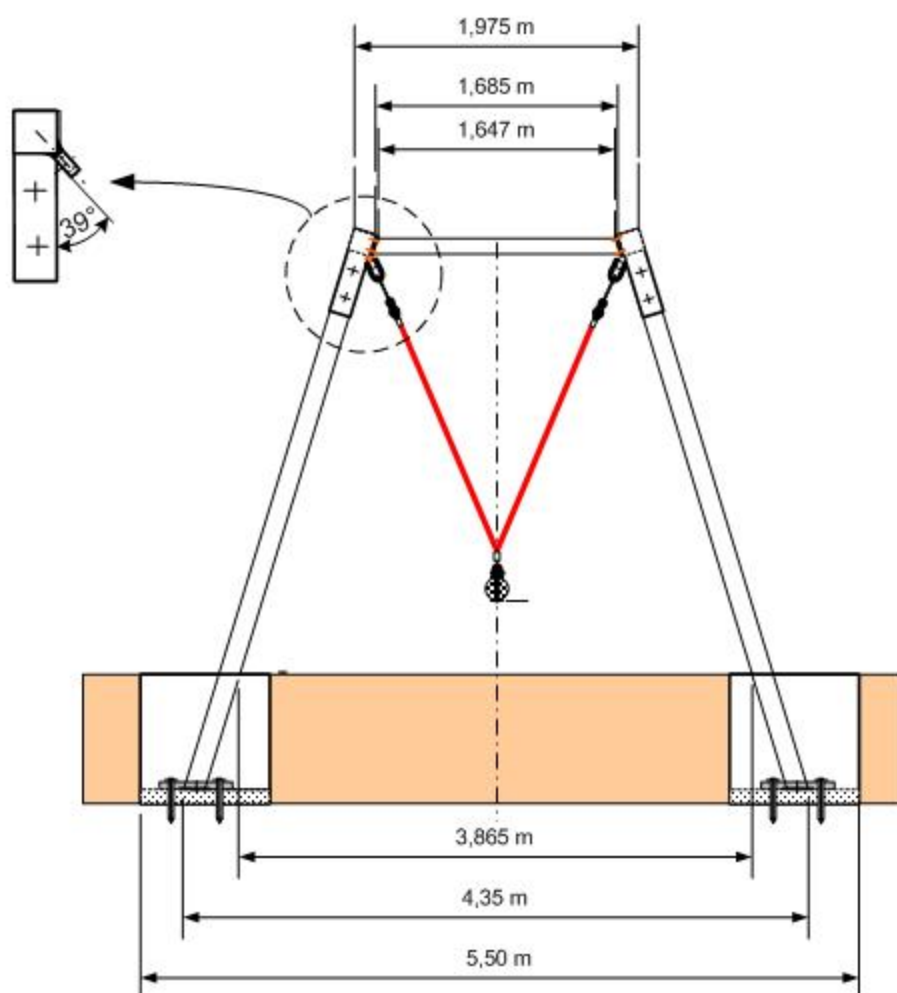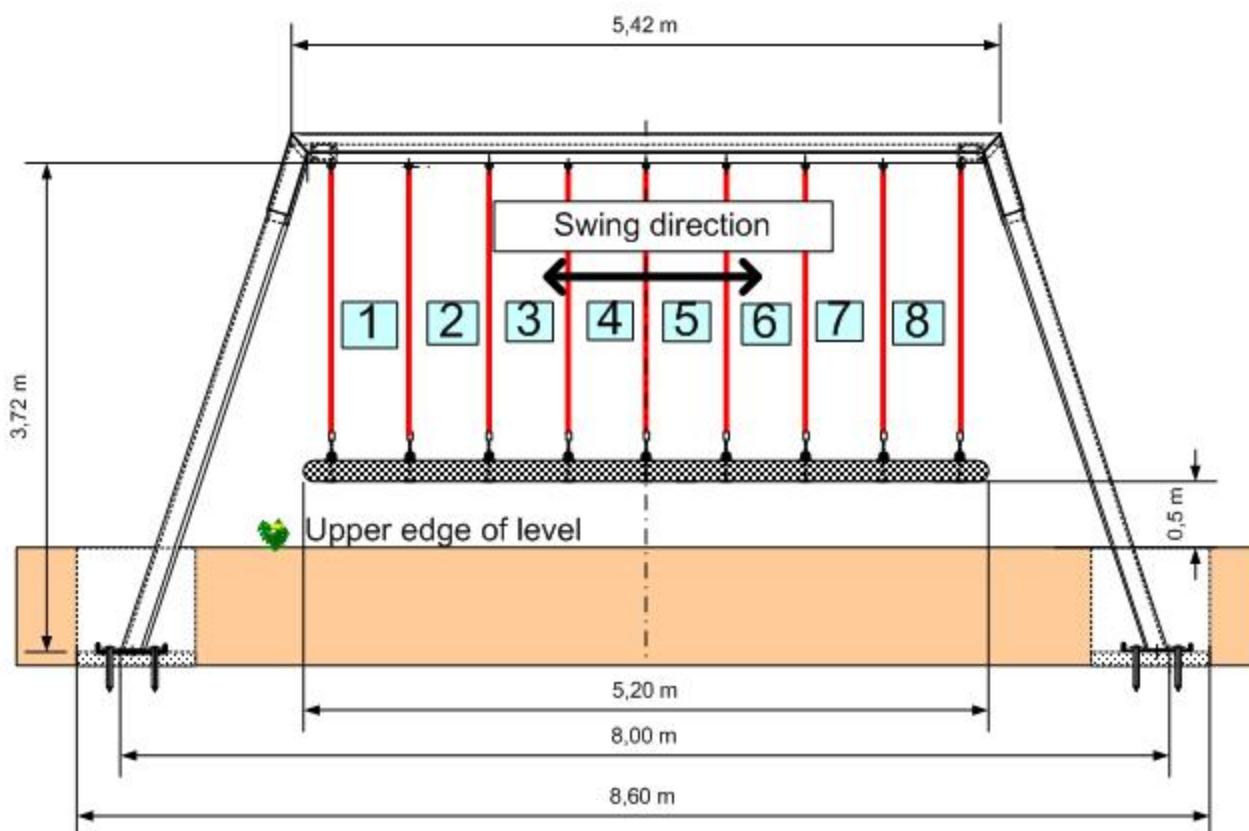

Approximately 2 weeks after assembling, you have to proof the strength of each screwed connection. In case of loosening, the fixations have to be retightened.

If the playground item is high strained, you have to put more attention to the check-up and the maintenance .

In case of repairs, incompletely installation or maintenance operations, the playground item has to be blocked.

Please contact your dealer, if you have got some assembling problems or other questions:



Super rope end swinger, Art # 4585-50

W = weekly

m = monthly

y = yearly

W

m

1/4y

1/2y

- | | | | | |
|--|-------------------------------------|-------------------------------------|--------------------------|-------------------------------------|
| 1. proof surface area underneath the item for dangerous objects | ☒ | ☐ | ☐ | ☐ |
| 2. proof stableness of standpole, bracing, foundation | ☐ | ☐ | ☐ | ☒ |
| 3. proof wastage and tightness of fixations. Retighten or replace damaged items if necessary | ☐ | ☒ | ☐ | ☐ |
| 4. proof moving parts (joints, springs, etc.) for wastage and function - replace if necessary. Greasing of joints is not necessary - only maintenance-free ball-bearings are used. | ☒ | ☐ | ☐ | ☐ |
| 5. proof all added items (chains, ropes, nets, etc.) for wastage or damage - replace if necessary | ☒ | ☐ | ☐ | ☐ |
| 6. proof all rubber items, sleeves, etc. for wastage and damage - replace if necessary. | ☒ | ☐ | ☐ | ☐ |
| 7. proof surface of wooden parts for wastage and damage - replace if necessary | ☒ | ☐ | ☐ | ☐ |
| 8. proof surface of plastic and metal parts (slides etc.) for wastage and damage - replace if necessary | ☒ | ☐ | ☐ | ☐ |

We recommend to carry out the checkup and maintenance operation according to our guidelines, because high strain, atmospheric influence or vandalism can cause the loss of safety and function.

In case of a damage, which affects the safety, the playground item has to be blocked or disassembled and repaired immediately.

Damage, which affects the function, can cause the loss of safety, decrease the fun for playing and excite to vandalism. In this case the item has also to be repaired immediately.



Any kind of repair and maintenance has to be done by a competent person.

General remarks:

a regularly checked playground item couldn't be dangerous, because it can not be damaged like a unchecked item.

But the requirement is the replacement of the damaged parts from the checked playground item.

[illegible]

Pos.	Quantity	Element	Description	Size
1	4		Stand post	140/140
2	2		Stringer	
3	2		Tie-bar	
4	4		Anchor plate	50 x 50
5	2		Main rope with pre-assembled suspension ropes, chains and shackles	
6	4		Hexagon screw	M16 x 20
7	16		Hexagon screw	M12 x 30lg.
8	16		Covering cap (M12)	
9	8		Threaded bolt	M10 x 180
10	16		Plain washer	M10
11	16		Self-locking nut	M10
12	16		Covering cap	M10
13	2		Loctite	
14	8		carbine	